


- Diagonal impeller with stator
- With Plastic housing
- 3-step
- Integrated thermostatic switch
- Including mounting bracket

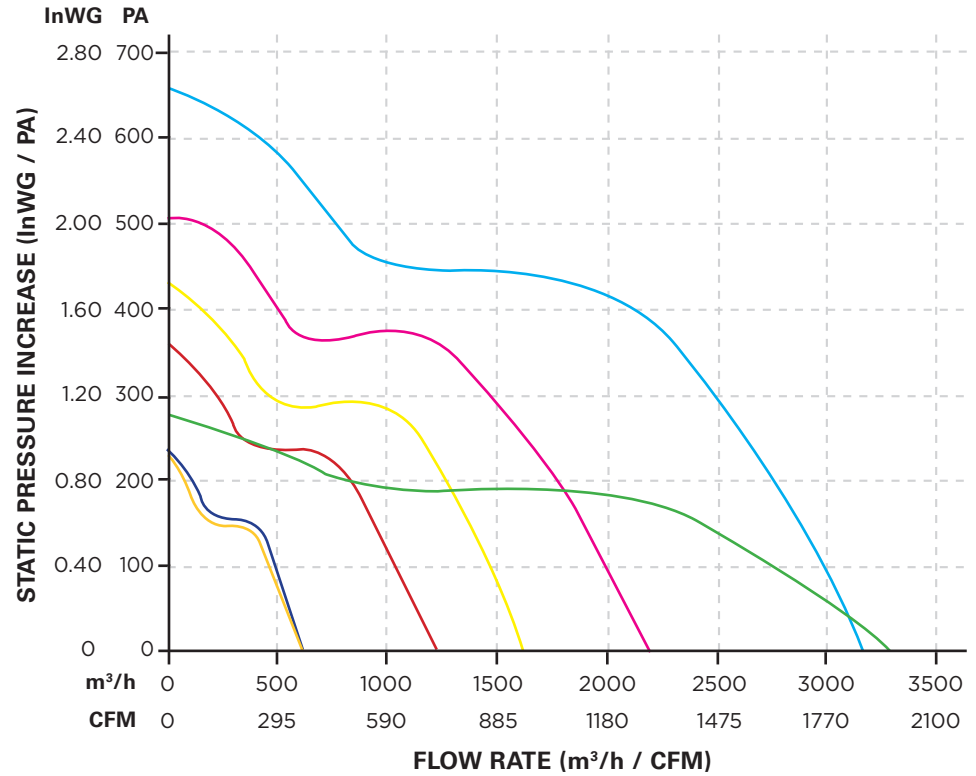

Type	ID	V	Hz	W	%	%	I _{max}	L _{WA2} dB(A)	L _{WA5} dB(A)	L _{WA6} dB(A)
EM 150L E2M 01	126547	230, 1-	50	46	31.00	36.60	0.29	57	69	67
EM 160L E2M 01	126549	230, 1-	50	45	33.90	37.50	0.29	57	66	66
EM 200 E2M 01	127249	230, 1-	50	117	40.90	45.50	0.58	59	72	74
EM 250 E2M 01	127317	230, 1-	50	170	46.60	49.50	0.81	61	75	78
EM 280 E2M 01	130471	230, 1-	50	239	49.70	52.90	1.12	63	77	80
EM 315 E2M 01	130677	230, 1-	50	436	52.90	56.40	2.06	68	82	84
EM 400 E4M 01	129165	230,1-	50	211	47.20	51.00	1.00	57	71	75

60Hz Performance will be slightly more in most models.

Contact **MASTER VENTILATION PRODUCTS, INC.** for details on models available in 60hz and specific performance. Website provides a request for quotation and information.

ERP (European Energy Regulation) for products meeting the requirements of the logo.

Manufactured by RUCK.