


DATA SHEET

22" Prime | 147572

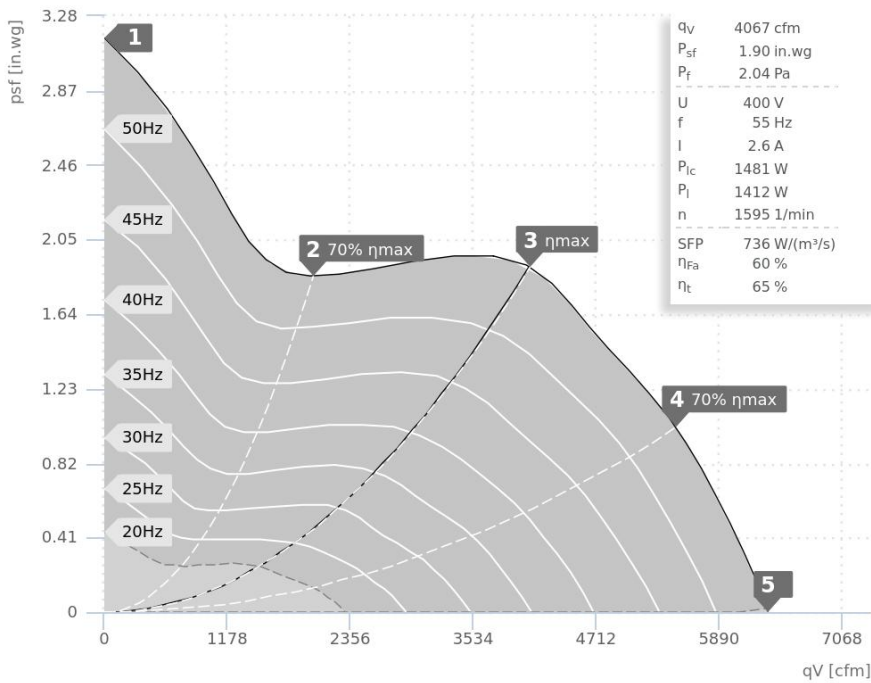

Operating Point		1	2	3	4	5
Current I	A	2,4	2,0	2,6	2,6	2,4
Power consumption P ₁	W	1288	977	1414	1448	1318
RPM n	1/min	1597	1612	1595	1595	1601
SPL inlet L _{WA5}	dB(A)	91	87	85	86	88
SPL outlet L _{WA6}	dB(A)	94	90	86	86	90
SPL casing break out L _{WA2}	dB(A)	84	81	78	77	81

22" Prime 147572	
Voltage U _N	400 V 3~
Current I _{max}	3,3 A
Ambient temperature t _A	60 °C
Medium temperatures t _M	60 °C
Speed Control	f
Motor protection	TAO
Insulation class motor	F
Weight	33,0 kg
Poles	4
IP motor	IP55
IP terminal box	-
Min. operating temperature	-20 °C

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	85	55	69	75	80	80	77	71	61
Outlet	L _{WA6}	86	45	68	77	82	80	77	73	64
Casing	L _{WA2}	78	51	59	69	75	71	67	61	52

Ruck Air Movement - Master Series by



2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881

www.mastervent.com marion.pye@mastervent.com