


DATA SHEET

6" S-Prime Evo | 147626

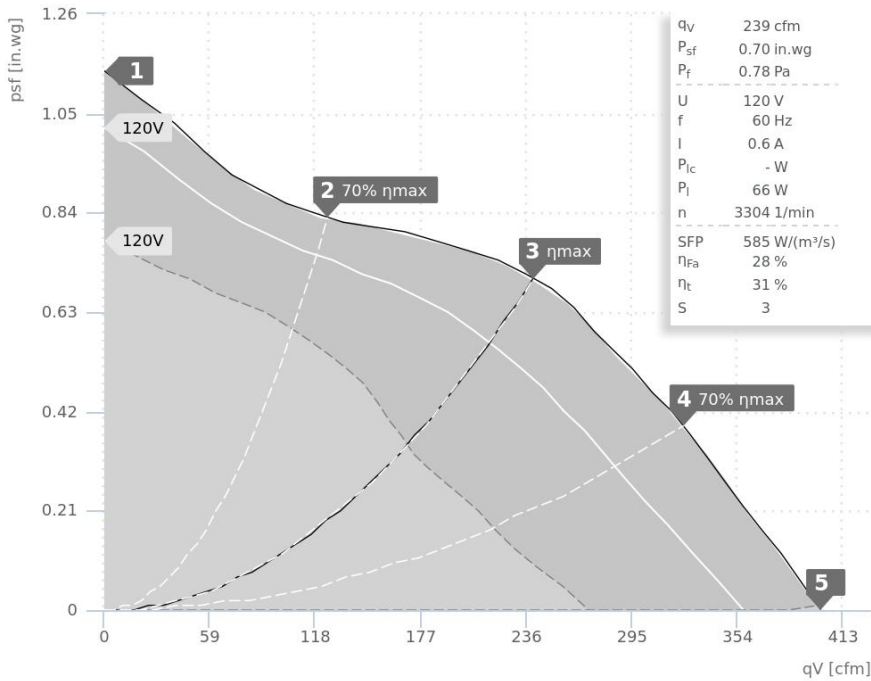

Operating Point		1	2	3	4	5
Current I	A	0,5	0,5	0,6	0,6	0,6
Power consumption P _l	W	60	58	66	70	68
RPM n	1/min	3360	3375	3304	3277	3298
SPL inlet L _{WA5}	dB(A)	60	60	64	64	65
SPL outlet L _{WA6}	dB(A)	60	61	64	66	66
SPL casing break out L _{WA2}	dB(A)	52	51	53	55	55

6" S-Prime Evo 147626	
Voltage U _N	120 V 1~
Current I _{max}	0,7 A
Ambient temperature t _A	40 °C
Medium temperatures t _M	40 °C
Speed Control	3-2-1
Motor protection	TAI
Insulation class motor	F
Weight	7,0 kg
Poles	2
IP motor	IP00
IP terminal box	IP44
Min. operating temperature	-25 °C

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	64	31	54	59	60	52	52	50	44
Outlet	L _{WA6}	64	33	49	60	61	54	51	44	33
Casing	L _{WA2}	53	35	38	45	50	47	40	31	28

Ruck Air Movement - Master Series by



2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881

www.mastervent.com marion.pye@mastervent.com