


DATA SHEET

8" Prime Evo | 147644

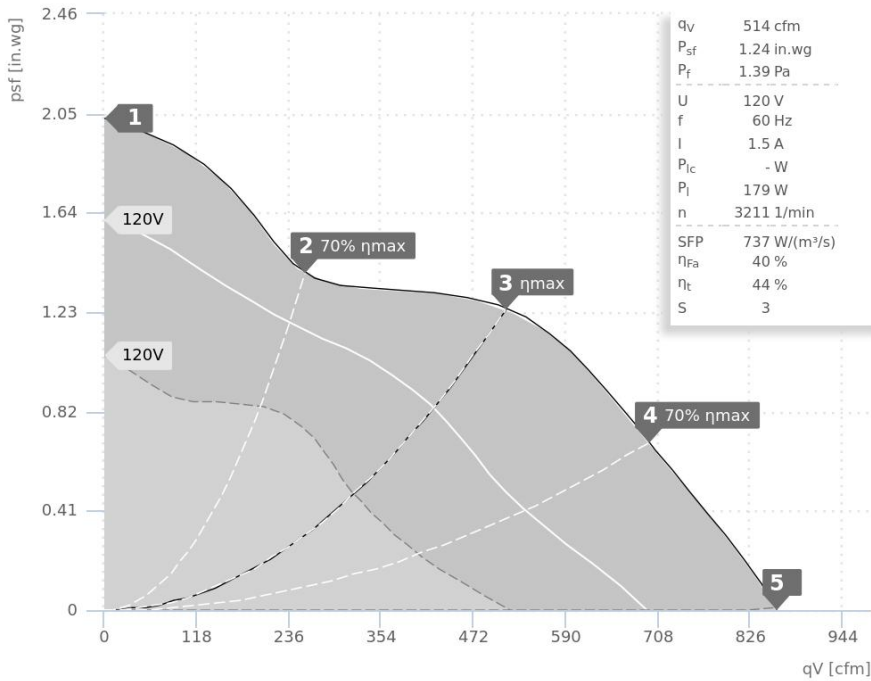

Operating Point		1	2	3	4	5
Current I	A	1,3	1,2	1,5	1,6	1,5
Power consumption P _i	W	155	144	179	192	180
RPM n	1/min	3328	3371	3212	3163	3250
SPL inlet L _{WA5}	dB(A)	78	77	79	77	78
SPL outlet L _{WA6}	dB(A)	77	77	77	76	78
SPL casing break out L _{WA2}	dB(A)	62	62	61	61	61

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	79	41	56	65	75	74	72	66	59
Outlet	L _{WA6}	77	45	58	67	71	73	69	66	57
Casing	L _{WA2}	61	46	48	53	55	55	54	46	38

8" Prime Evo 147644	
Voltage U _N	120 V 1~
Current I _{max}	1,7 A
Ambient temperature t _A	50 °C
Medium temperatures t _M	50 °C
Speed Control	3-2-1
Motor protection	TAI
Insulation class motor	F
Weight	5,1 kg
Poles	2
IP motor	IP00
IP terminal box	-
Min. operating temperature	-25 °C

Ruck Air Movement - Master Series by



www.mastervent.com marion.pye@mastervent.com

2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881