


DATA SHEET

12" Prime Evo EC | 147716

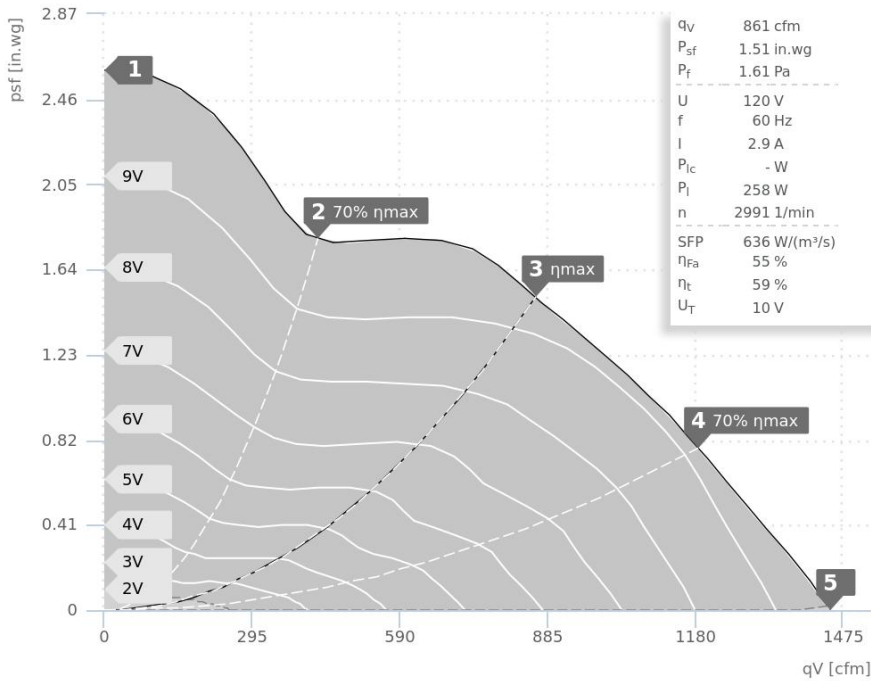

Operating Point		1	2	3	4	5
Current I	A	0,0	0,0	0,0	0,0	0,0
Power consumption P ₁	W	-	-	-	-	-
RPM n	1/min	-	-	-	-	-
SPL inlet L _{WA5}	dB(A)	-	-	-	-	-
SPL outlet L _{WA6}	dB(A)	-	-	-	-	-
SPL casing break out L _{WA2}	dB(A)	-	-	-	-	-

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	-	-	-	-	-	-	-	-	-
Outlet	L _{WA6}	-	-	-	-	-	-	-	-	-
Casing	L _{WA2}	-	-	-	-	-	-	-	-	-

12" Prime Evo EC 147716	
Voltage U _N	120 V 1~
Current I _{max}	3,1 A
Ambient temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	0-10V
Motor protection	TEC
Insulation class motor	F
Weight	0,0 kg
Poles	-
IP motor	IP30
IP terminal box	IP44
Min. operating temperature	-25 °C

Ruck Air Movement - Master Series by



www.mastervent.com marion.pye@mastervent.com

2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881