


DATA SHEET

4" Classic | 147806

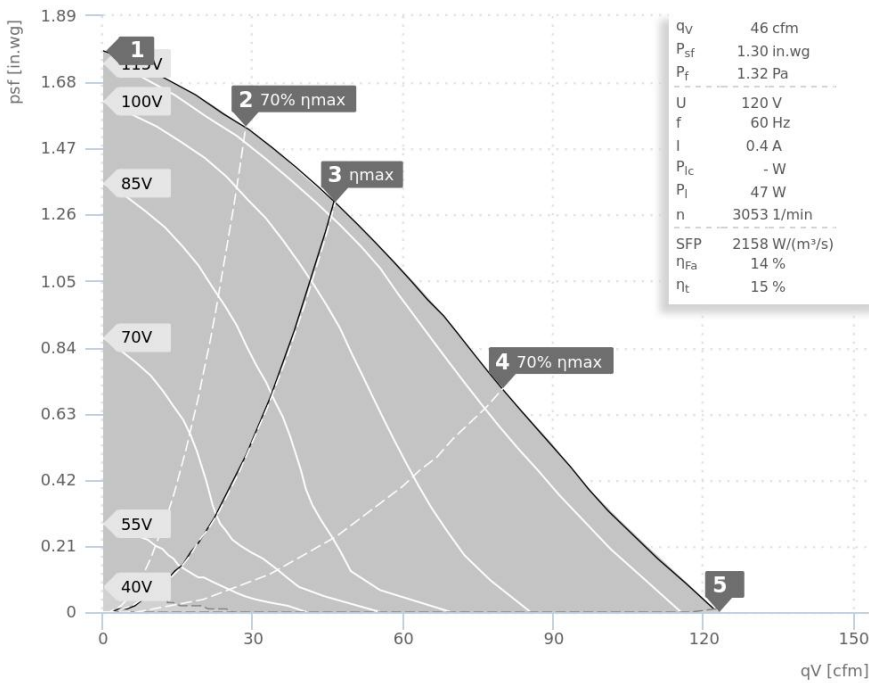

Operating Point		1	2	3	4	5
Current I	A	0,4	0,4	0,4	0,5	0,6
Power consumption P _l	W	35	41	47	62	75
RPM n	1/min	3289	3180	3051	2665	2124
SPL inlet L _{WA5}	dB(A)	63	62	61	61	61
SPL outlet L _{WA6}	dB(A)	63	62	62	62	62
SPL casing break out L _{WA2}	dB(A)	56	55	55	55	55

4" Classic 147806	
Voltage U _N	120 V 1~
Current I _{max}	0,7 A
Ambient temperature t _A	80 °C
Medium temperatures t _M	80 °C
Speed Control	V
Motor protection	TAI
Insulation class motor	F
Weight	3,0 kg
Poles	2
IP motor	IP33
IP terminal box	-
Min. operating temperature	-25 °C

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	61	37	46	54	53	57	54	47	37
Outlet	L _{WA6}	62	38	47	55	52	57	56	50	41
Casing	L _{WA2}	55	36	38	45	45	52	49	44	34

Ruck Air Movement - Master Series by



www.mastervent.com marion.pye@mastervent.com

2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881