


DATA SHEET

6" Classic | 147833

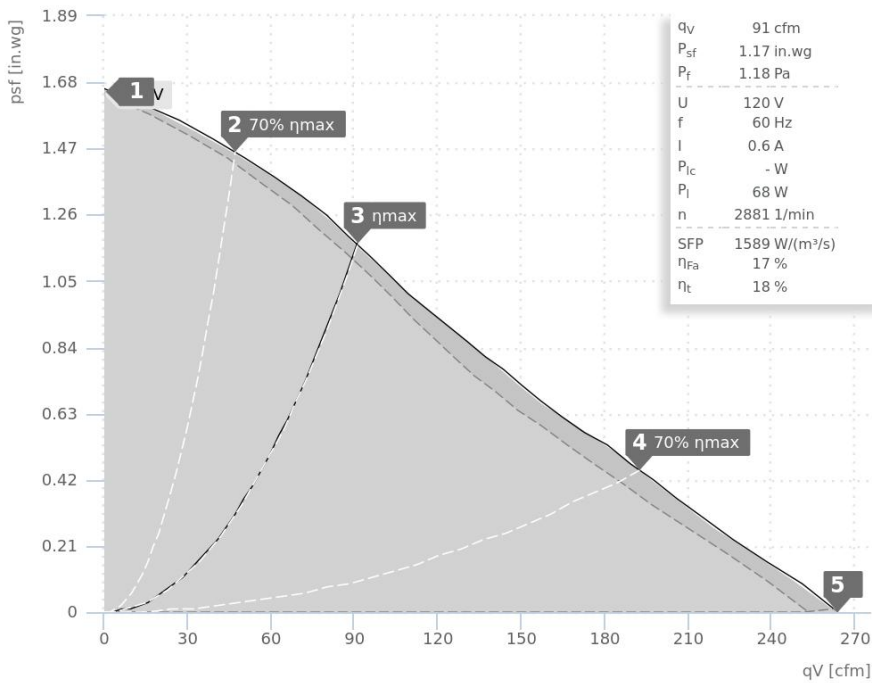

Operating Point		1	2	3	4	5
Current I	A	0,5	0,6	0,6	0,7	0,7
Power consumption P_1	W	54	61	68	78	78
RPM n	1/min	3262	3122	2879	2500	2552
SPL inlet L_{WA5}	dB(A)	70	67	68	68	69
SPL outlet L_{WA6}	dB(A)	71	70	69	68	69
SPL casing break out L_{WA2}	dB(A)	58	57	55	54	55

Sound power (L_W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L_{WA5}	68	34	42	53	62	63	63	55	46
Outlet	L_{WA6}	69	35	44	63	62	63	62	57	47
Casing	L_{WA2}	55	35	34	47	46	52	49	45	34

6" Classic 147833	
Voltage U_N	120 V 1~
Current I_{max}	0,7 A
Ambient temperature t_A	80 °C
Medium temperatures t_M	80 °C
Speed Control	V
Motor protection	TAI
Insulation class motor	F
Weight	0,0 kg
Poles	2
IP motor	IP33
IP terminal box	-
Min. operating temperature	-25 °C

Ruck Air Movement - Master Series by



www.mastervent.com marion.pye@mastervent.com

2082 58th Ave. Circle E.
Bradenton, FL 34203

Phone: 941.739.0879
Fax: 941.739.0881